


## 技术指标 SPECIFICATIONS

额定电压 (Rated Voltage)	630VDC	
标称容量 (Rated Capacitance)	0.82 uF	
电容量偏差 (Capacitance Tolerance)	J: $\pm 5\%$ K: $\pm 10\%$ (1KHZ;1V)	
耐电压 (Voltage Proof)	1.6 U <sub>R</sub> (VDC)/5S	
损耗角正切 (Dissipation Factor)	测试频率 Frequency	DF
	1KHZ	0.0010
	10KHZ	—
	100KHZ	—
绝缘电阻 (Insulation Resistance) (20°C, 100V, 1min)	$\geq 1.5 \times 10^4 \text{M}\Omega$ (C $\leq$ 0.33uF) $\geq 5000 \text{M}\Omega \cdot \text{uF}$ (C $>$ 0.33uF)	
可焊性 (Solder ability)	槽焊法: 235 $\pm$ 5°C, 2 $\pm$ 0.5S, 深入深度(离本体)2 <sub>-0.5</sub> mm) 沾锡面积 $\geq$ 95% Slot method: Thorough depth(leave the essence At least 95% of the circumferential face Wire up to immersed level shall be covered with new solder	

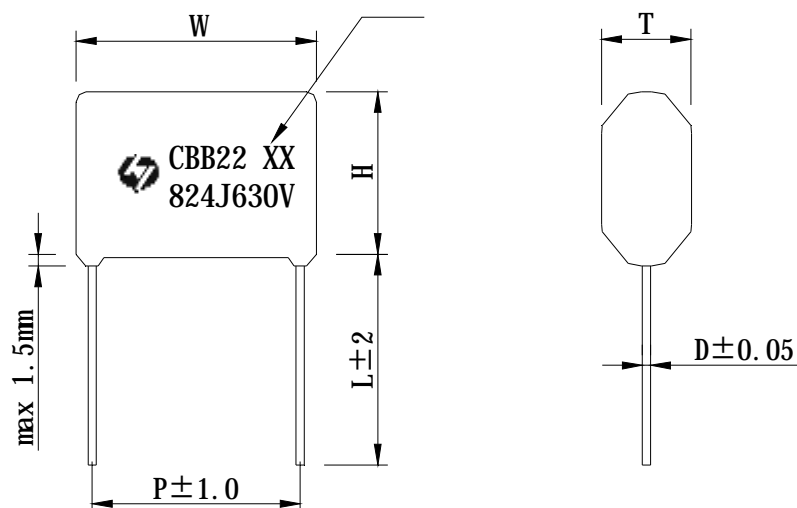

序号 NO. ,	产品名称 PART NAME	W max	T max	H max	P ( $\pm 1$ )	D ( $\pm 0.05$ )	L ( $\pm 2$ )
1	CBB22-824J630V20RN(1R)	23.0	12.5	19.0	20	0.8	24.5
2	以下空白 (the following blanks)						