


技术指标 SPECIFICATIONS

额定电压 (Rated Voltage)	630VDC				
标称容量 (Rated Capacitance)	0.68 μ F				
电容量偏差 (Capacitance Tolerance)	J: $\pm 5\%$ K: $\pm 10\%$ (1KHZ;1V)				
耐电压 (Voltage Proof)	1.6U _R 5S				
损耗角正切 (Dissipation Factor)	测试频率 Frequency	DF			
	1KHZ	0.0010			
	10KHZ	—			
	100KHZ	--			
绝缘电阻 (Insulation Resistance) (20°C, 100V, 1min)	$\geq 1.5 \times 10^4 M\Omega$ ($C \leq 0.33 \mu F$)				
	$\geq 5000 M\Omega \cdot \mu F$ ($C > 0.33 \mu F$)				
可焊性 (Solder ability)	<p>槽焊法: $235 \pm 5^\circ C$, $2 \pm 0.5S$, 插入深度(离本体) $2 \pm 0.5mm$ 沾锡面积 $\geq 95\%$</p> <p>Slot method: Thorough depth (leave the essence At least 95% of the circumferential face) Wire up to immersed level shall be covered with new solder</p>				

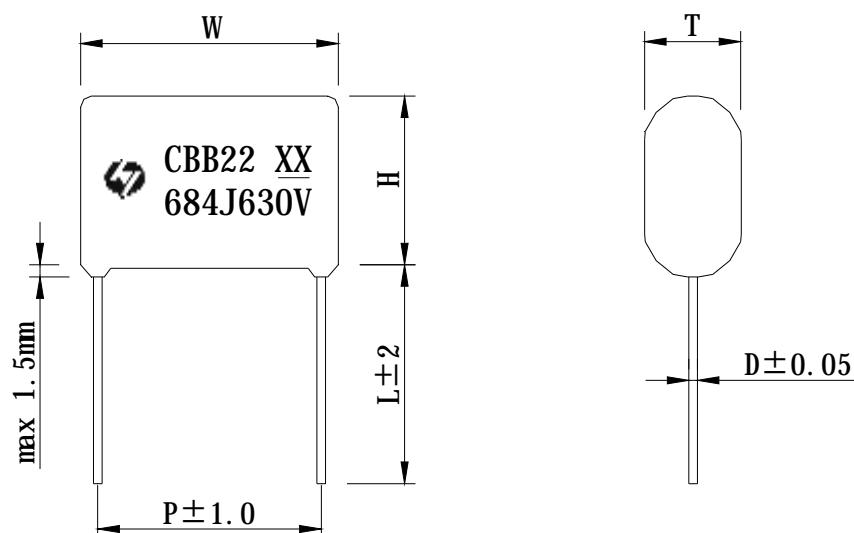

序号	产品名称 PART NAME	W max	T max	H max	P (±1)	D (±0.05)	L (±2)
1	CBB22-684J630V20RN(1R)	23.5	12.0	19.0	20	0.8	24.5