


技术指标 SPECIFICATIONS

额定电压 (Rated Voltage)	1250V	
标称容量 (Rated Capacitance )	0.0068 uF	
电容量偏差 (Capacitance Tolerance)	J: ±5% K: ±10% (1KHZ;1V)	
耐电压 (Voltage Proof)	1.75U <sub>R</sub> 5S	
损耗角正切 (Dissipation Factor)	测试频率 Frequency	DF
	1KHZ	0.0010
	10KHZ	—
	100KHZ	—
绝缘电阻 (Insulation Resistance) (20℃,100V,1min)	≥5×10 <sup>4</sup> MΩ	
可焊性 (Solder ability)	槽焊法: 235±5℃, 2±0.5S,深入深度(离本体)2 <sub>-0.5</sub> mm) 沾锡面积≥95% Slot method: Thorough depth(leave the essence At least 95% of the circumferential face Wire up to immersed level shall be covered with new solder	

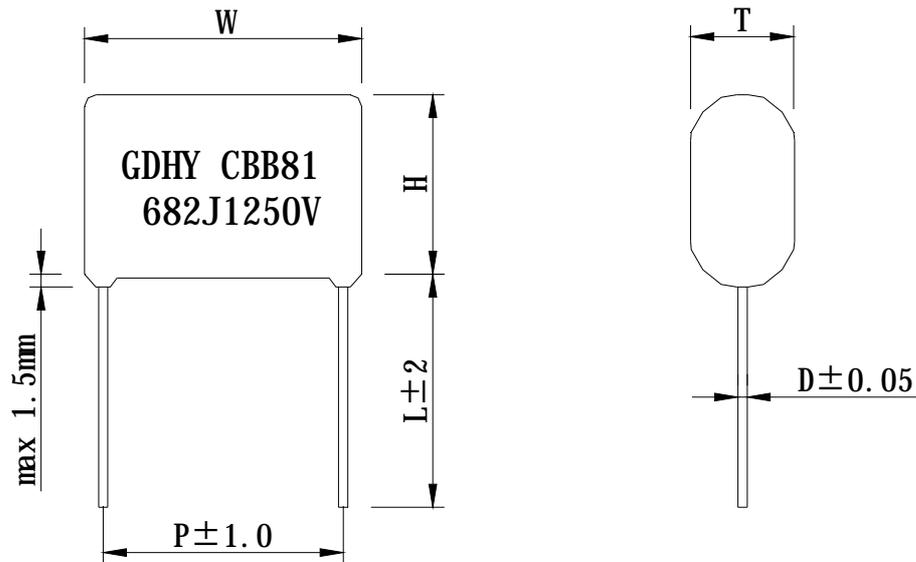

序号	产品名称 PART NAME	W max	T max	H max	P (±1)	D (±0.05)	L (±2)
1	CBB81-682J1250V15RN(1R)	18.5	8.0	12.0	15	0.6	25