


技术指标 SPECIFICATIONS

|                                                 |                                                                                                                                                                                                                        |        |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 额定电压 (Rated Voltage)                            | 1600V                                                                                                                                                                                                                  |        |
| 标称容量 (Rated Capacitance )                       | 0.0068 uF                                                                                                                                                                                                              |        |
| 电容量偏差 (Capacitance Tolerance)                   | J: ±5%    K: ±10% (1KHZ;1V)                                                                                                                                                                                            |        |
| 耐电压 (Voltage Proof)                             | 1.75U <sub>R</sub> 5S                                                                                                                                                                                                  |        |
| 损耗角正切 (Dissipation Factor)                      | 测试频率<br>Frequency                                                                                                                                                                                                      | DF     |
|                                                 | 1KHZ                                                                                                                                                                                                                   | 0.0010 |
|                                                 | 10KHZ                                                                                                                                                                                                                  | —      |
|                                                 | 100KHZ                                                                                                                                                                                                                 | —      |
| 绝缘电阻 (Insulation Resistance)<br>(20℃,100V,1min) | ≥5×10 <sup>4</sup> MΩ                                                                                                                                                                                                  |        |
| 可焊性 (Solder ability)                            | 槽焊法: 235±5℃, 2±0.5S,深入深度(离本体)2 <sub>-0.5</sub> mm)<br>沾锡面积≥95%<br>Slot method: Thorough depth(leave the essence At least 95% of the circumferential face<br>Wire up to immersed level shall be covered with new solder |        |

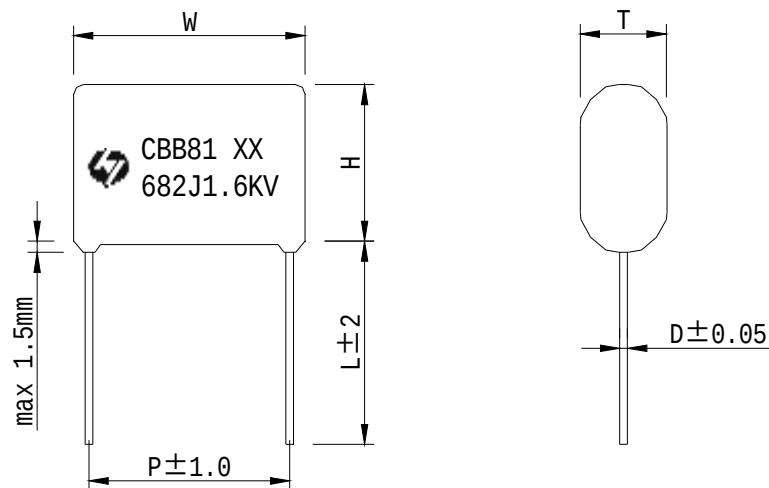

| 序号 | 产品名称<br>PART NAME       | W<br>max | T<br>max | H<br>max | P<br>(±1) | D<br>(±0.05) | L<br>(±2) |
|----|-------------------------|----------|----------|----------|-----------|--------------|-----------|
| 1  | CBB81-682J1.6KV15RN(1R) | 18.0     | 8.0      | 12.0     | 15        | 0.6          | 25        |