


技术指标 SPECIFICATIONS

额定电压 (Rated Voltage)	630VDC	
标称容量 (Rated Capacitance)	1.5 μF	
电容量偏差 (Capacitance Tolerance)	J: ±5% K: ±10% (1KHZ;1V)	
耐电压 (Voltage Proof)	1.6U _R (VDC)/5S	
损耗角正切 (Dissipation Factor)	测试频率 Frequency	DF
	1KHZ	0.0010
	10KHZ	—
	100KHZ	--
绝缘电阻 (Insulation Resistance) (20℃,100V,1min)	≥1.5×10 ⁴ MΩ (C≤0.33uF) ≥5000MΩ.uF (C>0.33uF)	
可焊性 (Solder ability)	槽焊法: 235±5℃, 2±0.5S,插入深度(离本体)2 _{-0.5} mm) 沾锡面积≥95% Slot method: Thorough depth(leave the essence At least 95% of the circumferential face Wire up to immersed level shall be covered with new solder	

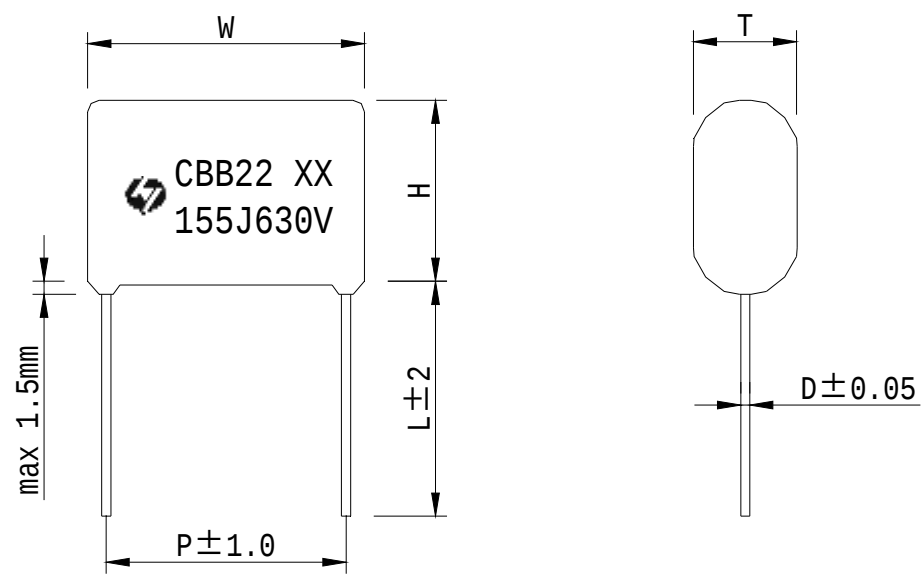

序号	产品名称 PART NAME	W max	T max	H max	P (±1)	D (±0.05)	L (±2)
1	CBB22-155J630V27RUN(1U)	30.5	12.5	19.0	27	0.8	24.5