


## 技术指标 SPECIFICATIONS

额定电压 (Rated Voltage)	1250VDC	
标称容量 (Rated Capacitance)	4.7 nF	
电容量偏差 (Capacitance Tolerance)	J: $\pm 5\%$ K: $\pm 10\%$ (1KHZ;1V)	
耐电压 (Voltage Proof)	1.75 U <sub>R</sub> (VDC)/5S	
损耗角正切 (Dissipation Factor)	测试频率 Frequency	DF
	1KHZ	0.0010
	10KHZ	—
	100KHZ	—
绝缘电阻 (Insulation Resistance) (20°C, 100V, 1min)	$\geq 5 \times 10^4 M\Omega$	
可焊性 (Solder ability)	<p>槽焊法: 235<math>\pm</math>5°C, 2<math>\pm</math>0.5S, 深入深度(离本体)2<sub>-0.5</sub>mm) 沾锡面积<math>\geq 95\%</math></p> <p>Slot method: Thorough depth(leave the essence At least 95% of the circumferential face Wire up to immersed level shall be covered with new solder</p>	

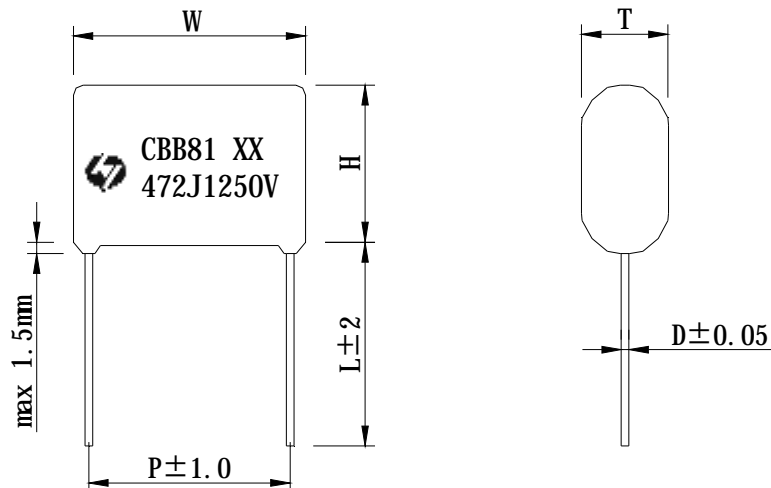

序号 NO. ,	产品名称 PART NAME	W max	T max	H max	P ( $\pm 1$ )	D ( $\pm 0.05$ )	L ( $\pm 2$ )
1	CBB81-472J1250V15RN(1R)	18.0	6.0	10.0	15	0.6	24.5